




- Rotates through 360° and pivot 90°.
- Manufactured from alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are UNC thread (ASME / ANSI B18.3.1M)
- Individually proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

Lifting Point

UNC Thread (8-212)

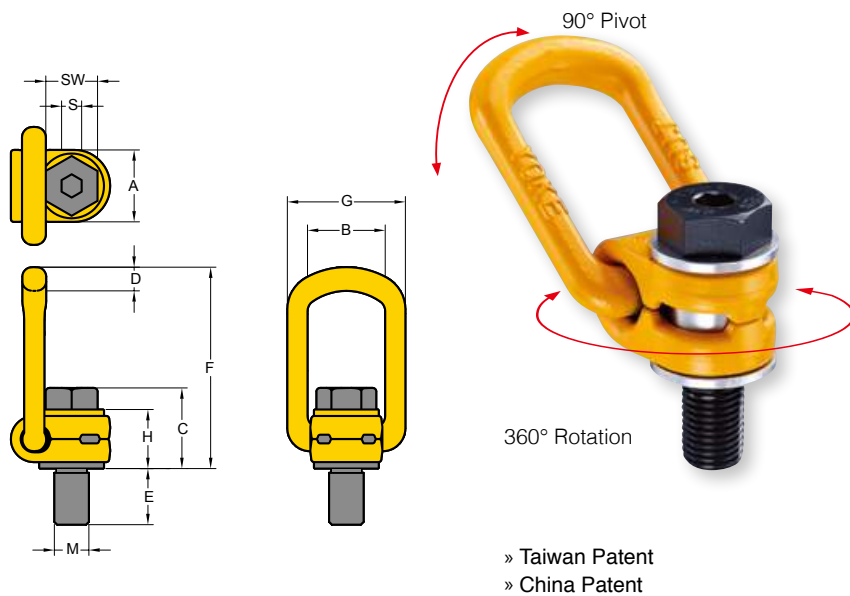

Item No.	Working Load Limit	Thread version			Dimensions									Torque in	N.W.
					M	E	TPI	A	B	C	D	F	G		
	tonnes	inch	inch					inch							Nm
8-212-010	1	1/2	0.75	13UNC	1.30	1.46	1.73	0.53	3.86	2.24	1.42	5/16	3/4	100	1.1
8-212-015	1.5	5/8	0.94	11UNC	1.30	1.46	1.81	0.53	3.86	2.24	1.42	3/8	15/16	150	1.1
8-212-020	2.5	3/4	1.10	10UNC	1.97	2.13	2.20	0.65	5.51	3.23	1.73	1/2	1 1/8	250	2.9
8-212-025	2.5	7/8	1.10	9UNC	1.97	2.13	2.28	0.65	5.51	3.23	1.73	5/8	1 5/16	300	2.9
8-212-040	4	1	1.61	8UNC	1.97	2.13	2.34	0.65	5.51	3.23	1.73	5/8	1 1/2	400	3.1
8-212-050	5	1 1/4	1.61	7UNC	2.36	2.56	3.23	0.89	6.69	3.90	2.44	7/8	1 7/8	500	6.8
8-212-080	8	1 1/2	2.25	6UNC	3.03	3.35	4.01	1.04	8.86	4.88	3.07	1	2 1/4	800	12.8
8-212-150	15	1 3/4	2.63	5UNC	3.74	4.09	4.48	1.42	10.08	6.22	3.39	1	2 5/8	1500	24.0
8-212-200	20	2	3.00	4.5UNC	3.74	4.09	4.76	1.42	10.20	6.22	3.54	1 1/4	3	2000	25.5

* Design Factor 4:1

* Bolt in GEOMET® finished on request